


Identify what matters





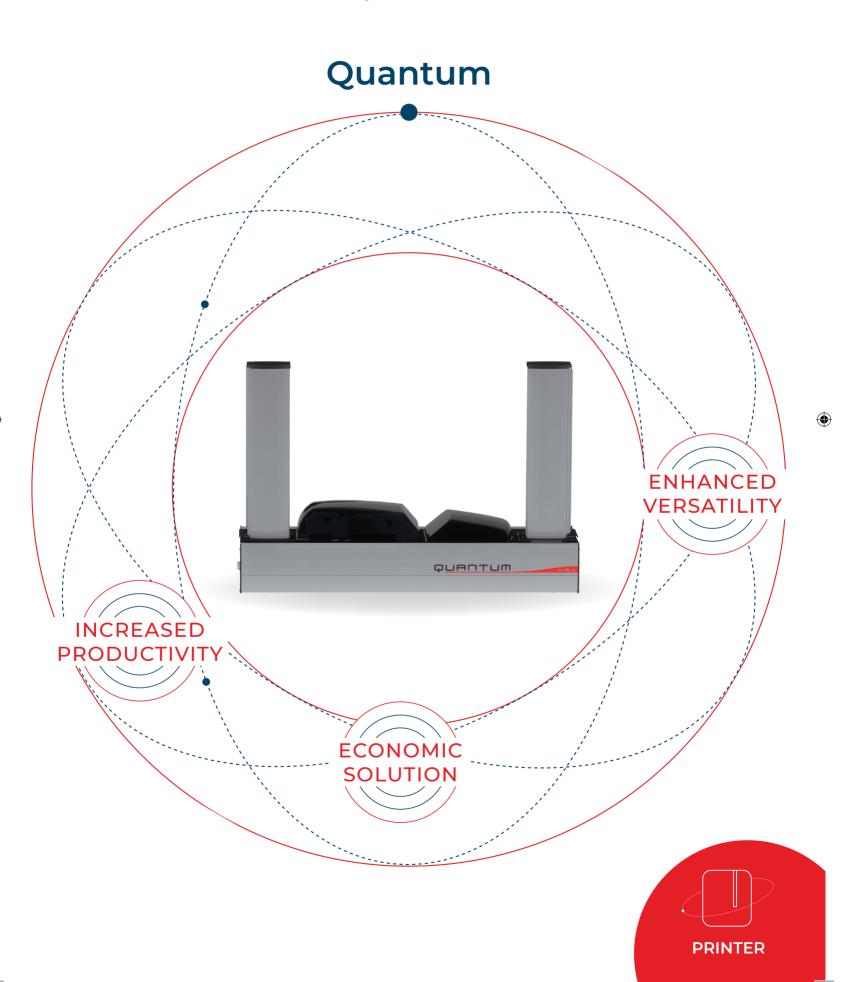

The Centralized Card **Production System**

The **Quantum** printer is the solution for printing and encoding cards in large volumes. It personalizes the cards front and back, in color or monochrome, with a record printing speed.

Quantum combines the feel of a desktop printer with the power of an industrial printer for centralized production of plastic cards in large quantities.



Increased productivity

- With a feed tray and stacker capacity of 500 cards each, the Quantum printer can deliver more than 1000 cards per hour in monochrome and 150 cards in color
- Thanks to reversible encoding module (magnetic stripes, contact smart cards and contactless cards) independent from the print module, the cards are encoded and printed in a single pass.



Enhanced versatility

- Quantum has been designed to be personalized on-site, directly by the user. For instance, you can add or reverse an encoder very easily and quickly.
- The card production system adapts to your evolutive needs: single or dual sided printing, diverse encoding modules, printing options and plastic card types available.



5136 7528 9536 7523

Economic solution

Quantum can handle large volumes of cards with very high print quality, providing a very economical alternative to industrial card printers.


€volisβα∩

TRANSP@RTPASS

You can control your costs and produce your cards yourself instead of having to go to an outside provider.



Ergonomic and wide opening systems with doors for an easy and quick card loading



QUANTUM

 Reversible upper and lower encoding unit for magnetic stripes and contact smart cards



- Interchangeable input & output hoppers (500 cards each)
- Large ribbon capacity
- Connecting panel & mounting area for users own integration of encoding units







Main Features

General features

- · 2 configurations:
- Standard version without locking mechanism
- Version with centralized locking system
- · Direct-to-card dye-sublimation/ Resin thermal transfer
- · Single-sided and dual-sided printing module
- · Edge-to-edge printing
- · 300 dpi print head (11.8 dots/mm)
- · 16 MB memory (RAM) allowing two card storages (front & back)
- · Interchangeable input and output hoppers, capacity of 500 cards each (0.76 mm - 30 mil)
- · Aluminum body, black plastic covers

Additional encoding modules

- · Reversible upper and lower encoding unit for magnetic stripes and contact smart cards (patented)
- · HiCo/LoCo magnetic stripe encoder ISO 7811 or JIS2
- Smart contact station ISO 7816-2
- · Connecting panel and mounting area for users own integration of encoding units
- · Encoding options:
- Smart encoding unit PC/SC, EMV 2000-1
- Contactless encoding unit -ISO14443A & B, MIFARE, DESFire, HID iCLASS
- Other types upon request

Safety

· Centralized locking system (optional) to secure access to the whole system (incl. cards and ribbon)

Oisplay

- · 2-line LCD display
- · Status LED for printer and encoding unit monitoring

© Card management and specifications

- · Detachable and interchangeable card input feeder and output stacker with 500 cards capacity (0.76 mm - 30 mil)
- · Reject hopper for defective cards with a capacity of 20 cards (0.76mm - 30mil)
- · Detachable hopper (long or short doors) with a capacity of 500 cards (0.76 mm - 30 mil) as an option
- · Card types: PVC cards, composite PVC cards, PET cards, ABS cards¹, special varnished cards¹
- · Card format: ISO CR80 ISO 7810 (53.98 mm x 85.60 mm)
- · Thickness: 0.76mm to 1mm (30 to 40 mil)

Additional pack offer

- · Quantum Production Pack: 1 detachable card hopper with short door, 2 cleaning rollers, 1 cleaning kit
- · Quantum Backup Pack: 1 print head, 1 reversible encoding module, 1 detachable card hopper with short door

Printing performances²

- · Single side:
- Color (YMCKO): 150 cards/hour
- Monochrome: 1000 cards/hour
- · Dual side:
- Color (YMCKO-K): 115 cards/hour
- Monochrome: 320 cards/hour

Interfaces

- · USB (1.0, 1.1, 2.0, 3.0), cable supplied
- · Ethernet TCP-IP 10BaseT, 100BaseT (Traffic Led)

© Evolis High Trust® ribbons

To maximize the quality and durability of printed cards, the lifespan of the print head and the overall printer reliability, use Evolis High Trust® ribbons.

· Ribbon saver for monochrome printing

List of ribbons available on www.evolis.com

Software & Applications







- · CardPresso XXS for designing and printing badges. Compatible for Windows® and Mac.
- OS compatibility details available on www.cardpresso.com
- · Drivers for Windows®, Mac OS and Linux

OS compatibility details available on www.evolis.com

Certifications and statement of compliance


- · RoHS
- · CE, FCC, VCCI, ICES
- · EAC²

Size and weight

- · Size (H x W x D):
- Without hoppers: 215 x 300 x 850 mm (8.46" x 11.81" x 33.46")
- With hoppers: 567 x 300 x 850 mm (22.32" x 11.81" x 33.46")
- · Weight: 21.7 kg / 47.8 lbs (18.3 kg / 40.3 lbs without hoppers)

Warranty

- · 1-year warranty (printer and print head) limited to 500,000 insertions3
- · Warranty extension available as an option












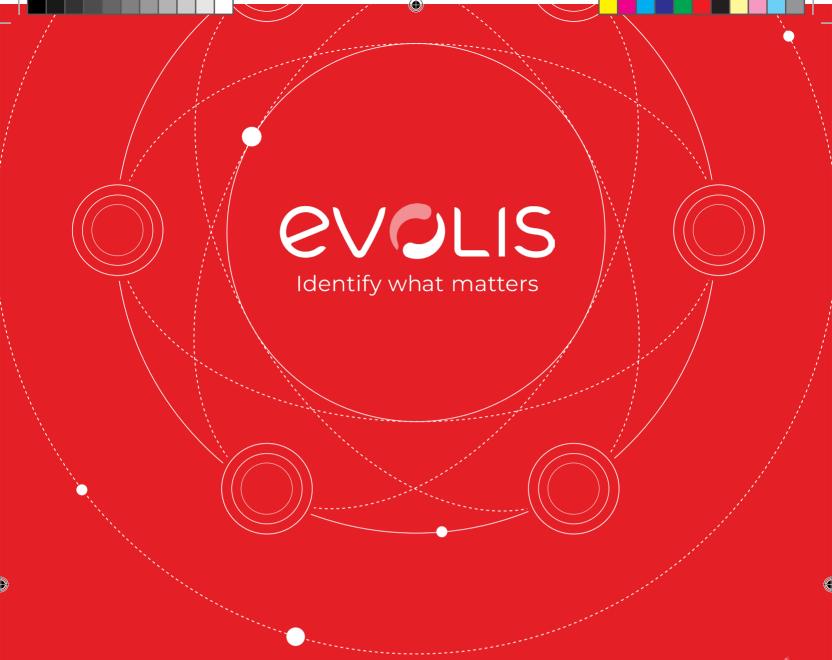

A GLOBAL PROVIDER OF IDENTIFICATION SOLUTIONS

- Worldwide leader in card personalization systems for decentralized issuance
- International expertise and local support through a network of 400 distributors in 140 countries
- A unique ability to meet specific customer requirements with a Project department dedicated to design and construction of tailor-made solutions
- Evolis is ISO 9001 certified, which reflects our comprehensive approach, both in terms of quality and continuous improvement

www.evolis.com

HQ / EUROPE - MIDDLE-EAST - AFRICA

Evolis - 14 avenue de la Fontaine - ZI Angers-Beaucouzé 49070 - Beaucouzé - FRANCE

T +33 (0) 241 367 606 - F +33 (0) 241 367 612 - info@evolis.com

USA - CANADA

Evolis Inc. - Providence - RI - USA - evolisinc@evolis.com

LATIN AMERICA

Evolis Inc. - Fort Lauderdale - FL - USA - evolisinc@evolis.com

ASIA - PACIFIC

Evolis Asia Pte Ltd - Singapore - evolisasia@evolis.com

CHINA

Evolis China - Shanghai - evolischina@evolis.com

INDIA

Evolis India - Mumbai - evolisindia@evolis.com